

# MAST PUMPEN

## Submersible pump TP 8 – 1


DIN 14 425 PVR 306/11/84 IP68

high-performance • robust • reliable

### Technical data:

Submersible pumps feat. MD – Electronic System  
automatic rotating direction facility, phase-failure protection, temperature protection, voltage monitoring

Application area: raw water  
Motor: 3~ 400 V AC  
Output  $P_1 / P_2$ : 3,0 / 2,4 KW  
Rated current: 5,5 A  
Grain passage: Ø 10 mm  
Connection size: G 2 ½ " (B – Storzcoupling)  
Weight: 40 kg  
Dim. Ø x H x B: 260 x 560 x 390 mm

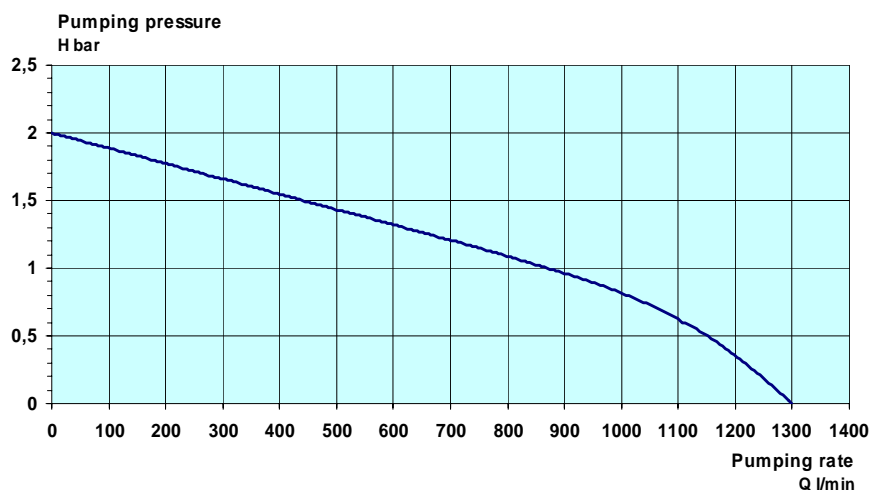

Valid for  $\rho = 1 \text{ kg/dm}^3$  and kinematical viscosity  $\eta = 1 \text{ mm}^2/\text{s}$ .  
Accurate to DIN 1944.

### TP 8 - 1

l / min.	bar
1300	0
1150	0,5
870	1,0
440	1,5
0	2,0

Pumping rate Q l/min.  
acc. to DIN 1944  
at a pumping pressure bar

## MAST PUMPEN GmbH

Pump Manufacturer  
Mörkestr. 1  
D - 73773 Aichwald  
Tel. +49 (0)711/ 93 67 04 - 0  
Fax +49 (0)711/ 93 67 04 - 30  
E-Mail: [info@mast-pumpen.de](mailto:info@mast-pumpen.de)  
Internet: <http://www.mast-pumpen.de>  
Subject to change. FE08 10.04

Highest quality and technical perfection.