

MAST PUMPEN

Submersible pump T 6

high-performance • robust • reliable

Technical data:


Submersible pump

no oil chamber, maintenance-free, dry-running safe, standard flat-suction system

Application area:	raw water
Motor:	3~ 400 V AC
Output P ₁ / P ₂ :	1,6 / 1,2 KW
Rated current:	2,9 A
Grain passage:	Ø 8 mm
Connection size:	G 2" (C – Storzcoupling)
Weight:	22 kg
Dim. Ø x H x B:	200 x 500 x 230 mm



pump. head H m

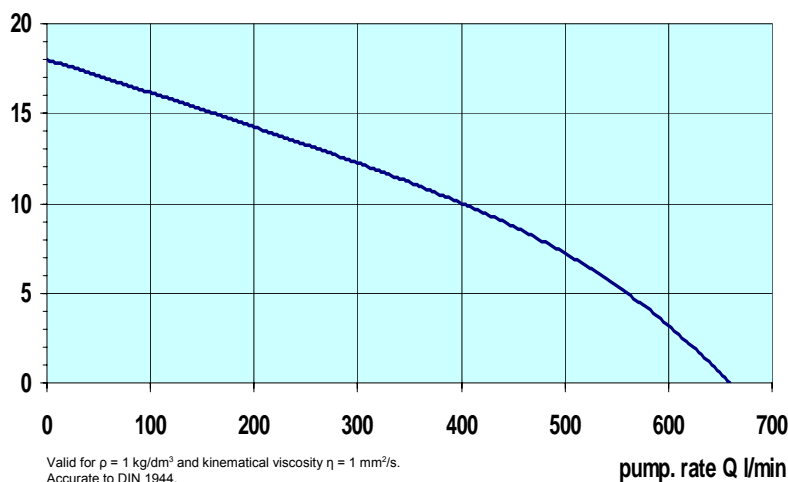

T 6

l / min.	m
660	0
560	5
400	10
160	15
0	18

Pumping rate Q l/min.
acc. to DIN 1944
at a pumping head H m

MAST PUMPEN GmbH

Pump Manufacturer
Mörkestr. 1
D - 73773 Aichwald
Tel. +49 (0)711/ 93 67 04 - 0
Fax +49 (0)711/ 93 67 04 - 30
E-Mail: info@mast-pumpen.de
Internet: <http://www.mast-pumpen.de>

Subject to change. FE02 10.04

Highest quality and technical perfection.