

MAST PUMPS Submersible pump T 6 L

high-performance • robust • reliable

Technical data:

Submersible pump

no oil chamber, maintenance-free, dry-running safe, standard flat-suction system

Application area: raw water

Motor: 1~ 230 V AC

Output P_1 / P_2 : 1,6 / 1,2 KW

Rated current: 8,1 A

Grain passage: \varnothing 8 mm


Connection size: G 2" (C – Storzcoupling)

Weight: 21 kg

Dim. \varnothing x H x B: 200 x 500 x 230 mm



pump. head H m

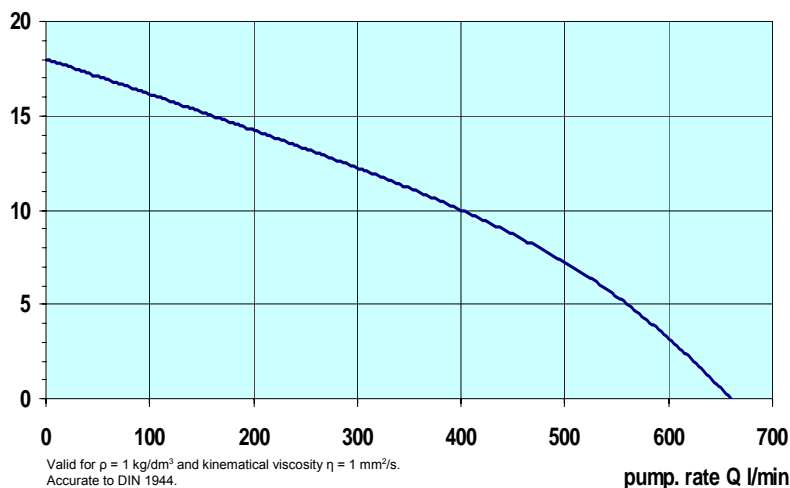

T 6 L

l / min.	m
660	0
560	5
400	10
160	15
0	18

Pumping rate Q l/min.
acc. to DIN 1944
at a pumping head H m

MAST PUMPEN GmbH

Pump Manufacturer

Mörkestr. 1

D - 73773 Aichwald

Tel. +49 (0)711/ 93 67 04 - 0

Fax +49 (0)711/ 93 67 04 - 30

E-Mail: info@mast-pumpen.de

Internet: <http://www.mast-pumpen.de>

Subject to change. FE01 10.04

Highest quality and technical perfection.