

# MAST PUMPEN

## Submersible pump T 8

high-performance • robust • reliable

### Technical data:


#### Submersible pump

no oil chamber, maintenance-free, dry-running safe, standard flat-suction system

Application area:	raw water
Motor:	3~ 400 V AC
Output $P_1 / P_2$ :	2,0 / 1,5 KW
Rated current:	3,8 A
Grain passage:	Ø 8 mm
Connection size:	G 2 ½ " (B – Storzcoupling)
Weight:	23 kg
Dim. Ø x H x B:	200 x 500 x 230 mm



pump. head H m

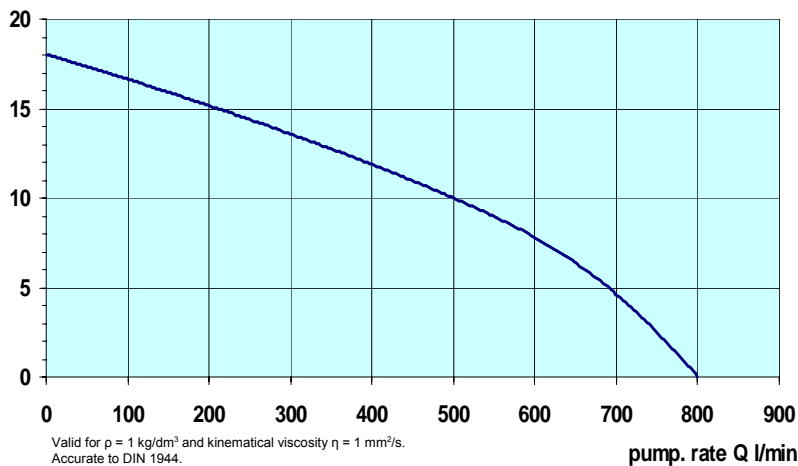

### T 8

l / min.	m
800	0
690	5
500	10
210	15
0	18

Pumping rate Q l/min.  
acc. to DIN 1944  
at a pumping head H m

### MAST PUMPEN GmbH

Pump Manufacturer  
Mörkestr. 1  
D - 73773 Aichwald  
Tel. +49 (0)711/ 93 67 04 - 0  
Fax +49 (0)711/ 93 67 04 - 30  
E-Mail: [info@mast-pumpen.de](mailto:info@mast-pumpen.de)  
Internet: <http://www.mast-pumpen.de>  
Subject to change. FE03 10.04

Highest quality and technical perfection.